

Approvals



Life expectancy


L-10 LIFE AT 40°C:
80 000 hours

AC Motor

Electrical protection: impedance protected
Housing material: zamak
Impeller material: plastic UL 94 VO
Weight: 465 g
Bearing system: ball bearings

Available with:

- Speed sensor
- Connection type: leads

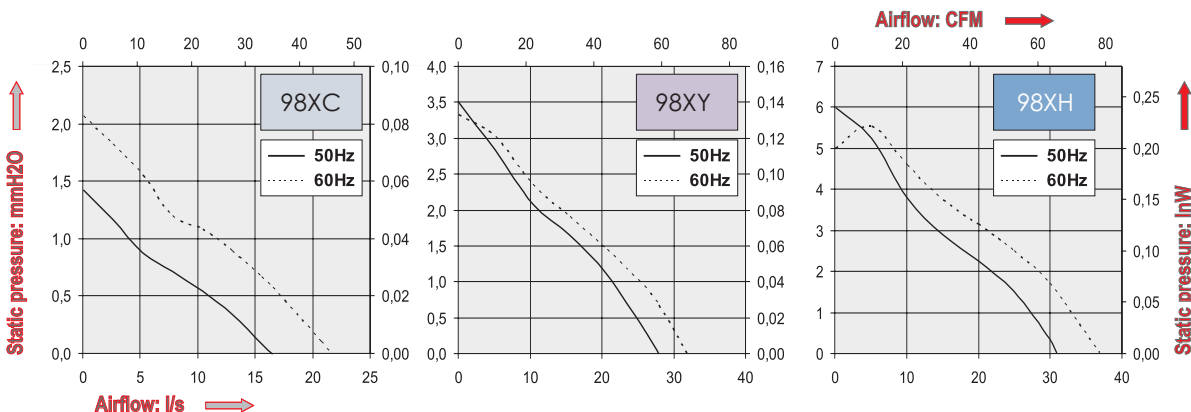

Part Number	Nominal voltage	Airflow	Noise level	Nominal speed	Frequency	Phases	Capacitor	Input Power	Nominal current	Starting current	Connection type		Operating temperature	
	V										l/s	dB(A)	RPM	Hz
98XC0182000	115	16	32	1300	50	1		12	130	150	X	X	-10	70
		21	35	1700	60	1		10	110	130	X	X	-10	70
98XC0181000	208-240	16	32	1300	50	1		14	80	90	X	X	-10	70
		21	35	1700	60	1		12	70	75	X	X	-10	70
98XY0182000	115	27	36	2100	50	1		10	120	140	X	X	-10	70
		31	38	2400	60	1		9	100	120	X	X	-10	70
98XY0181000	208-240	27	36	2100	50	1		12	65	80	X	X	-10	70
		31	38	2400	60	1		10	65	80	X	X	-10	70
98XH0182000	115	31	41	2555	50	1		13	135	200	X	X	-10	70
		37	44	3000	60	1		11	110	180	X	X	-10	70
98XH0181000	208-240	31	41	2550	50	1		15	80	100	X	X	-10	70
		37	44	3000	60	1		13	65	90	X	X	-10	70

Additional versions:

others speeds - Salt spray protected - shock and vibration protected - marine specifications - wide temperature range
IP54: consult factory

Accessories:

Refer to Accessories leaflet