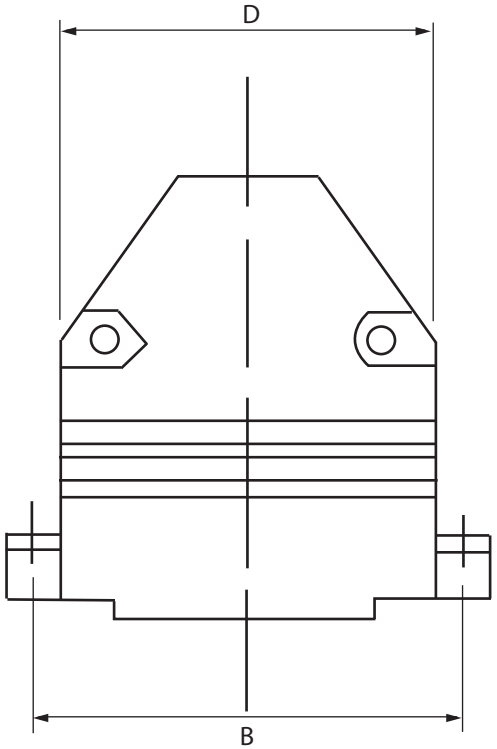

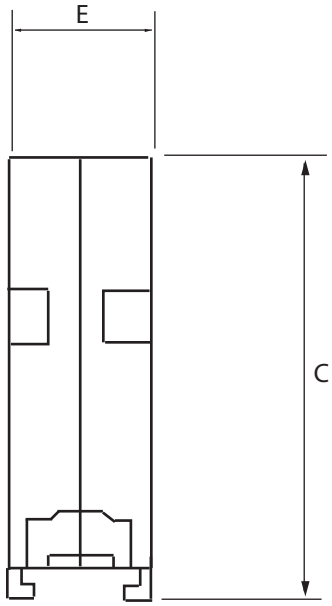

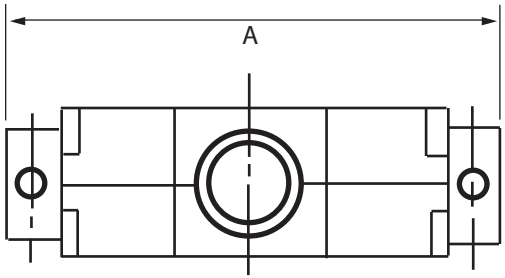

No. of contacts	A	B	C	D	E
09	31.4	25.0	48.2	19.8	12.3
15	40.1	33.3	48.3	27.5	15.9
25	53.4	47.0	48.5	41.6	15.7
37	69.2	63.5	48.8	57.2	20.8

Material:
These two-piece die-cast hoods are available with straight cable exit and short screws.
These hoods are low cost and easy to assemble.

Suitable knurled screws
AGP-RS/NEW
1 Set=2 pieces

AGP-x-G-METAL-R

No. of contacts
9, 15, 25, 37

Included items:
- 2 Half shells
- 2 Fixing screws
- 4 Screws
- 2 Strain reliefs
- 2 Nuts
- 2 Claws

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	11.22.11	Chappell
Approved		

ASSMANN WSW components

Item No.
AGP-x-G-METAL-R

Title
D-Sub Hood, Die-Cast, Metal Type

Drawing No.

rev00

Replace

Sheet