



FEUX DE SIGNALISATION INDUSTRIELLE

V 12-24-48-110-240 (±10%)		==	~ 50/60 Hz	IP 55	
°C -30 +50	On ∞		PC	AUTO-EXTINGUIBLE	


LUMIERE FIXE



SMFR 6.3 F
SMFR 6.3 F
(47) (48)

 BA 15d 5W LR BA 15d 5W	V ==	12	24	48	110	240
	V ~					
	mA	415	210	105	45	20
	Cd (p)	30	30	10	3	3

SMFR6.3F32412DA	69480
SMFR6.3F32424DA	69481
SMFR6.3F32448DA	69482
SMFR6.3F324110DA	69483
SMFR6.3F324240DA	69484

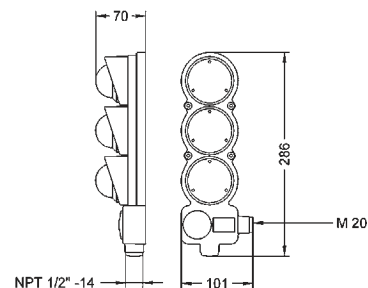


Kg. 0.53



SMFR 9.3 F
SMFR 9.3 F
(47) (48)

 BA 15d 10W LR BA 15d 10W	V ==	12	24	48	110	240
	V ~					
	mA	830	415	210	90	45
	Cd (p)	160	150	140	20	30

SMFR9.3F32412DA	69485
SMFR9.3F32424DA	69486
SMFR9.3F32448DA	69487
SMFR9.3F324110DA	69488
SMFR9.3F324240DA	69489

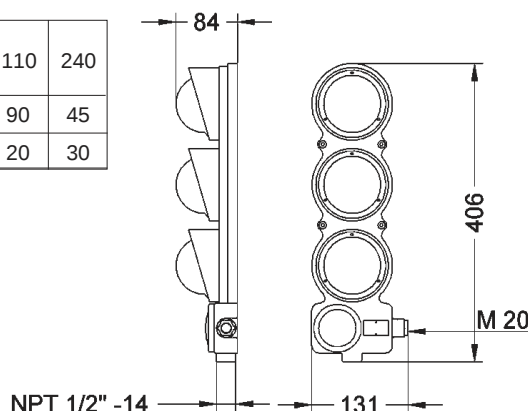


Kg. 0.75



SMFR 12.3 F
SMFR 12.3 F
(47) (48)

 BA 15d 25W LR BA 15d 25W	V ==	12	24	48	110	240
	V ~					
	A	2.1	1.1	0.52	0.22	0.10
	Cd (p)	450	500	500	50	80

SMFR12.3F32412DA	69490
SMFR12.3F32424DA	69491
SMFR12.3F32448DA	69492
SMFR12.3F324110DA	69493
SMFR12.3F324240DA	69494

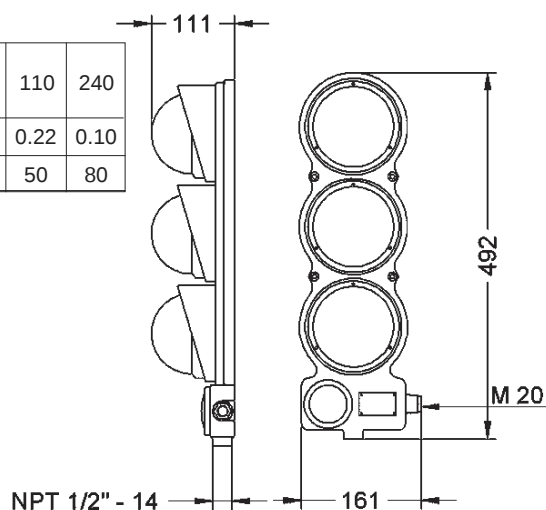

Kg. 1.00

D'autres couleurs disponibles sur demande

VERSIONS SPECIALES A LUMIERE CLIGNOTANTE SUR DEMANDE

Disponibles versions à LEDS intégrées – voir catalogue no. 6 "LIGNE LUMINEUSE A LEDS INTEGREES"