


8310 CÉ	PTF/30	5 x 20
---------	--------	--------


CORPS ISOLANT	NOIR	COUVERTURE	CONTACT S	CATEGORIE
INSULATING BODY	BLACK	COVER	CONTACT S	CLASS
PC UL 94 V0		PC UL 94 V0	CuZn 37 + Ni + Sn	PC1



COURANT NOMINAL	TENSION	PUISSANCE DISSIPABLE	RESISTANCE DE CONTACT	RESISTANCE D'ISOLEMENT	RIGIDITE DIELECTRIC
NOMINAL CURRENT	VOLTAGE	OPERATING POWER	CONTACT RESISTANCE	INSULATION RESISTANCE	DIELECTRIC STRENGTH
6,3 A	250 V	1,6 W	< 5 mΩ	> 10 ¹² MΩ	> 3000 vac/60"




PTF/30

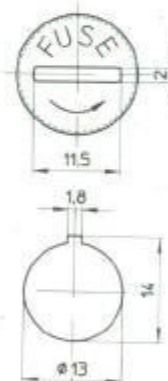


Mounting holes



PTF/10 PTF/20	5 x 20	CÉ
------------------	--------	----

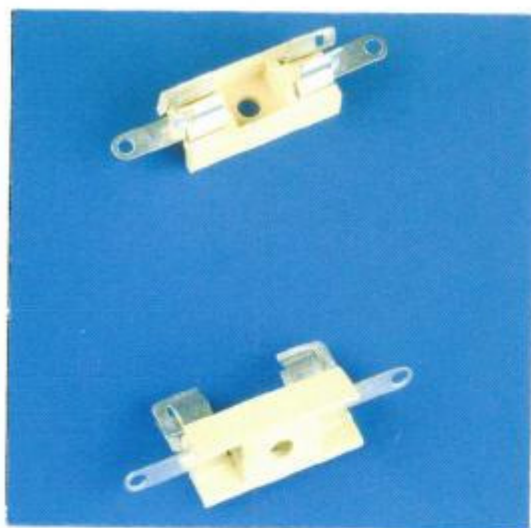

PTF/10

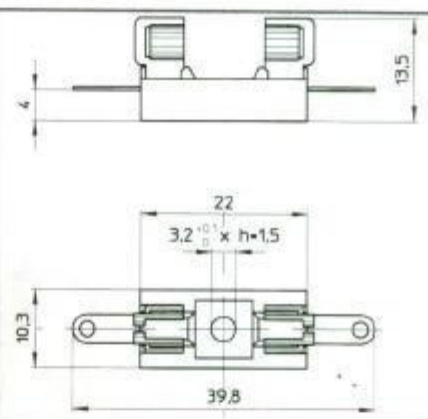

PTF/20


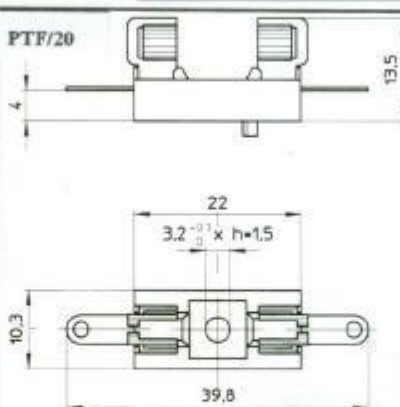


Mounting holes



CORPS ISOLANT	BEIGE	CONTACTS	CATEGORIE
INSULATING BODY	BEIGE	CONTACTS	CLASS
PPOM UL 94 V1		CuZn 37 + Ni + Sn	PC1

COURANT NOMINAL	TENSION	PUISSANCE DISSIPABLE	RESISTANCE DE CONTACT	RESISTANCE D'ISOLEMENT	RIGIDITE DIELECTRIC
NOMINAL CURRENT	VOLTAGE	OPERATING POWER	CONTACT RESISTANCE	INSULATION RESISTANCE	DIELECTRIC STRENGTH
6,3 A	250 V	1,6 W	< 5 mΩ	> 10 ¹² MΩ	> 3000 vac/ 60"

CE	PTF/60	5 x 20
-----------	---------------	---------------

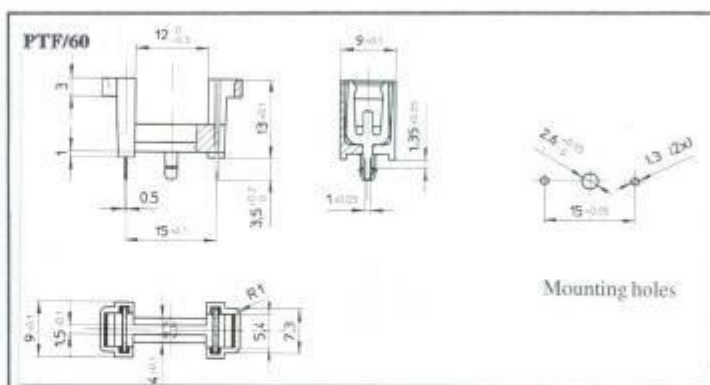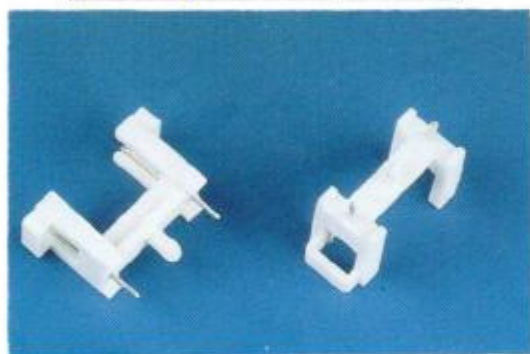




CORPS ISOLANT	BLANC	CONTACTS	PERCAGE C.I.		CATEGORIE
INSULATING BODY	WHITE	CONTACTS	P.C.B. MOUTING HOLE		CLASS
PBT UL 94 V0		CuSn 7 + Sn	Ø 1,3		PC1
COURANT NOMINAL	TENSION	PUISSANCE DISSIPABLE	RESISTANCE DE CONTACT	RESISTANCE D'ISOLEMENT	RIGIDITE DIELECTRIC
NOMINAL CURRENT	VOLTAGE	OPERATING POWER	CONTACT RESISTANCE	INSULATION RESISTANCE	DIELECTRIC STRENGTH
6,3 A	250 V	1,6 W	< 5 mΩ	> 10 ² MΩ	> 3000 vac/60°
PTF/78	5 x 20				

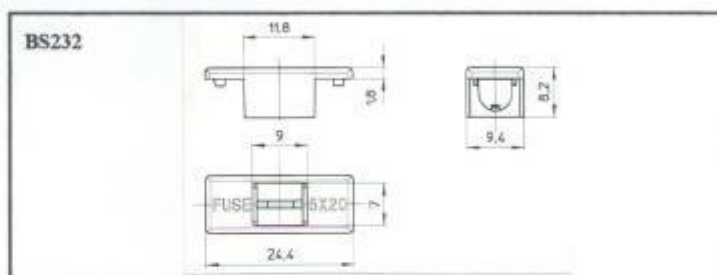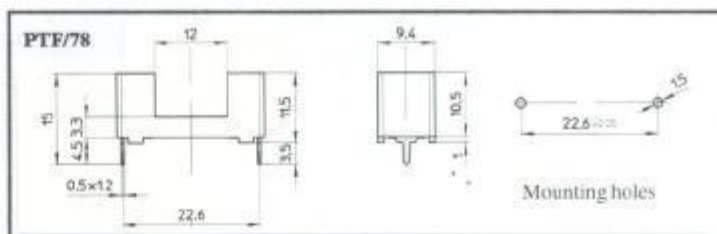

CORPS ISOLANT	COULEUR	COUVERTURE	CONTACTS	PERCAGE C.I.	CATEGORIE
INSULATING BODY	VERT	COVER	CONTACTS	P.C.B. MOUTING HOLE	CLASS
PA 68 UL 94 V0	GREEN	PA 68 UL 94 VO	CuZn 37 + Ni + Sn	Ø 1,5 mm	PC1
COURANT NOMINAL	TENSION	PUISSANCE DISSIPABLE	RESISTANCE DE CONTACT	RESISTANCE D'ISOLEMENT	RIGIDITE DIELECTRIC
Nominal current	VOLTAGE	OPERATING POWER	CONTACT RESISTANCE	INSULATION RESISTANCE	DIELECTRIC STRENGTH
6,3 A	250 V	1,6 W	< 5 mΩ	> 10 ² MΩ	> 3000 vac/60°

PORTE-FUSIBLES/ FUSE-HOLDERS

PTF/15	5 x 20	CE
--------	--------	----

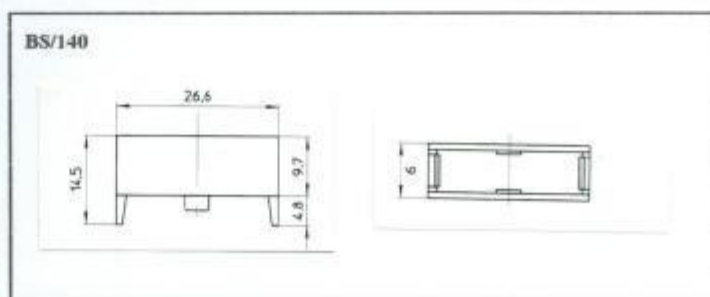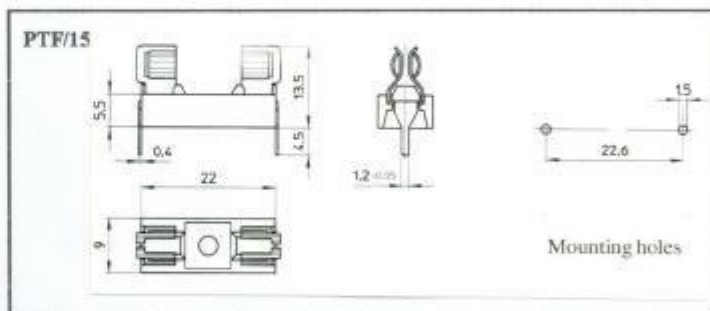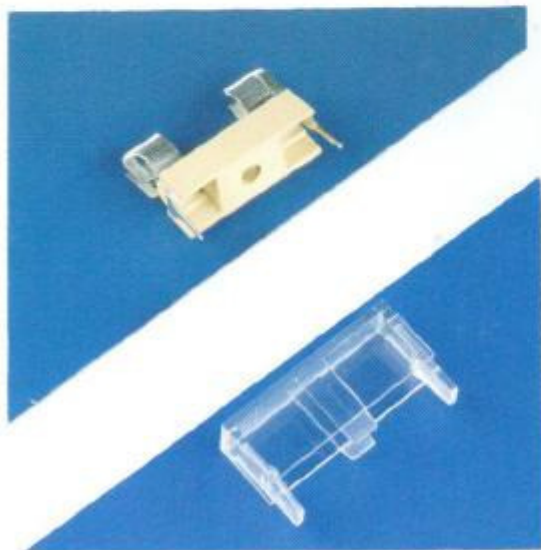


CORPS ISOLANT	COULEUR	COUVERTURE	CONTACTS	PERCAGE C.I.	CATEGORIE
INSULATING BODY	BEIGE	COVER	CONTACTS	P.C.B. MOUNTING HOLE	CLASS
PPOM UL 94 V1		BS 140 - SAN BS 140 - PC UL 94 VO	CuZn 37 + Ni + Sn	Ø 1,3 / 1,5 mm	PC1


COURANT NOMINAL	TENSION	PUISSANCE DISSIPABLE	RESISTANCE DE CONTACT	RESISTANCE D'ISOLEMENT	RIGIDITE DIELECTRIC
Nominal current	VOLTAGE	OPERATING POWER	CONTACT RESISTANCE	INSULATION RESISTANCE	DIELECTRIC STRENGTH
6,3 A	250 V	1,6 W	< 5 mΩ	>10 ² MΩ	> 3000 vac/60°

3/15 ECO: couleur noire / color black

CE

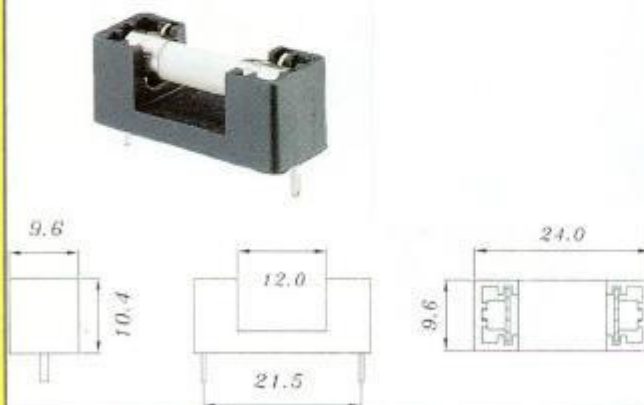

3/140 ECO: couleur noire / color black


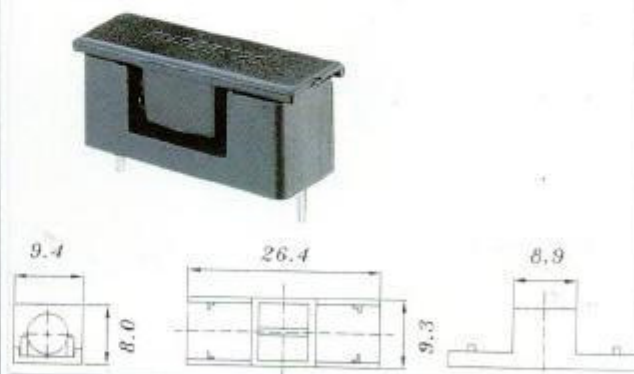


PTF/45
PTF/50

5 x 20




PTF/45

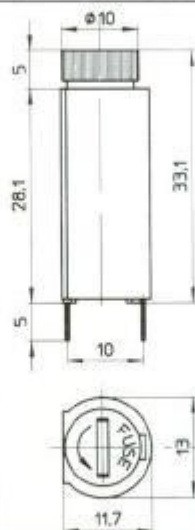

Mounting holes

PTF/50



Mounting holes

CORPS ISOLANT	NOIR	COUVERTURE	CONTACTS	PERCAGE C.I.	CATEGORIE	SEMKO FIMKO
INSULATING BODY	BLACK	COVER	CONTACTS	P.C.B. MOUTING HOLE	CLASS	
PC UL 94 V0		PBT UL 94 V0	CuZn 37 + Ni + Sn	Ø 1,3 mm	PC2	

COURANT NOMINAL	TENSION	PUISSANCE DISSIPABLE	RESISTANCE DE CONTACT	RESISTANCE D'ISOLEMENT	RIGIDITE DIELECTRIC
Nominal current	VOLTAGE	OPERATING POWER	CONTACT RESISTANCE	INSULATION RESISTANCE	DIELECTRIC STRENGTH
6,3 A	250 V	2,5 W	< 5 mΩ	>10 ² MΩ	> 3000 vac/60"

PF.9
PF.10

5 x 20

PF.10

PF-10



PF.9

PF-9

