

PLR SERIES

PROFESSIONAL MINIATURE ROTARY SWITCHES


GENERAL SPECIFICATIONS

- Max. voltage (resistive) : 250V AC/DC
- Max. current : 150mA
- Initial contact resistance : 20 mΩ max.
- Insulation resistance: 1.000 MΩ min.
- Dielectric strength : 1.000 Vrms
- Life : 10.000 cycles
- Operating torque : 8,6 Ncm ±2
- End stop torque : 1,13 Ncm min.
- Fixing torque : 1,1 Ncm max.
- Operating temperature : -30°C to +85°C
- Standard hardware supplied : 1 hex nut and 1 locking ring
- Special accessories (buttons) : see page 7


MATERIALS

- Moulded parts : PA 6/6, glass filled
- Contacts : brass, gold or silver plated, depending on version

PANEL CUT-OUT



Dimensions

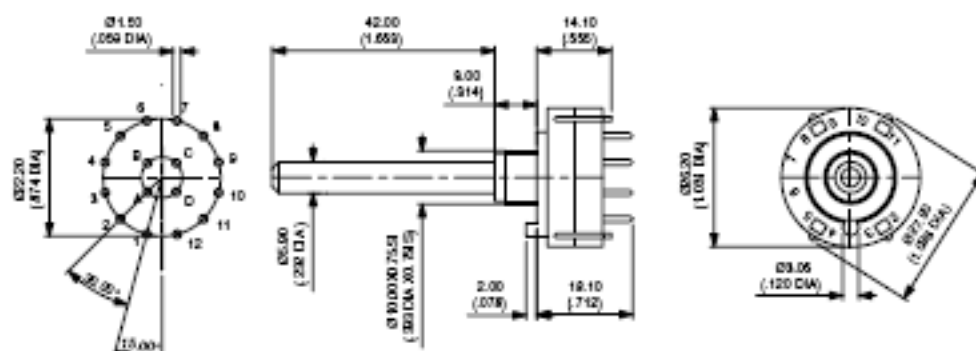

Available configurations (top view)

30° INDEXING (standard)
(models listed opposite)



1 pole, 12 pos.



2 poles, 6 pos.



3 poles, 4 pos.



4 poles, 3 pos.

60° INDEXING
(on request)



1 pole, 6 pos.



2 poles, 3 pos.



3 poles, 2 pos.



4 poles, 2 pos.

90° INDEXING
(on request)



1 pole, 4 pos.



2 poles, 2 pos.



3 poles, 2 pos.