



Transformateurs chassis Fixation BE

Raccordement par cosses à souder.

Bobinage Imprégné au vernis diélectrique.

Classe de température "B" 130°C

Delta T° 80°C Ta 40°C

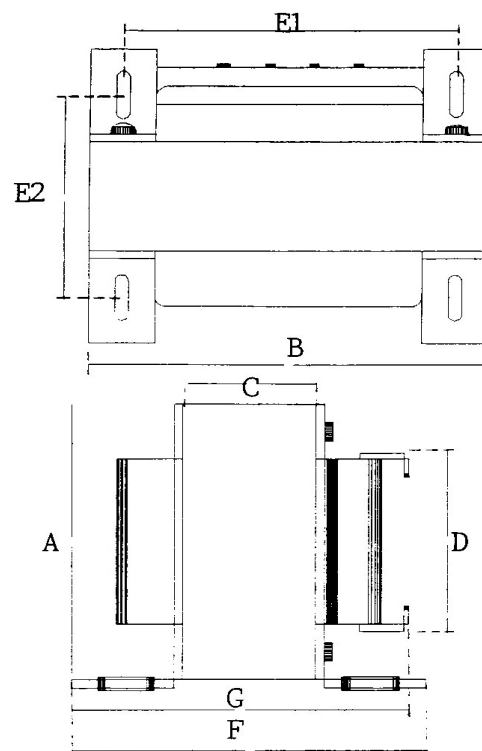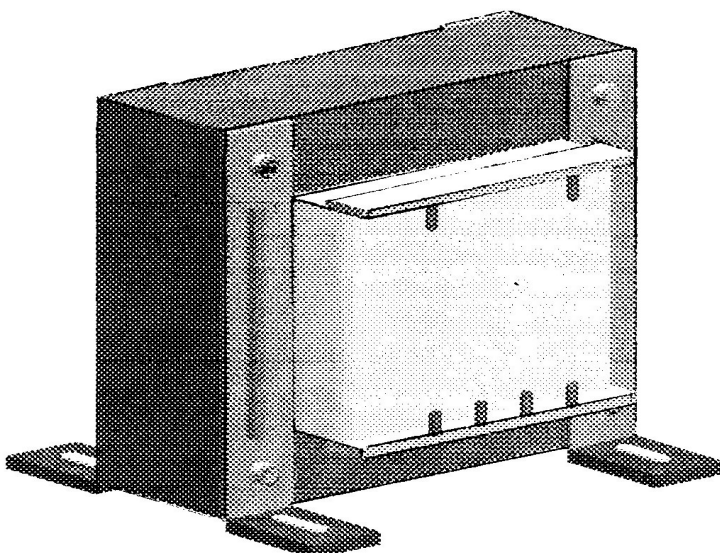

Ref.	Puissan en VA	A	B	C	D	F	G	E1	E2	Poids en Kg
K 25	25	52	60	26	35	61	63	50	51	.63
K 35	35	52	60	30	35	65	67	50	55	.75
K 30	30	57	66	26	40	69	69	55	60	.75
K 40	40	57	66	31	40	74	74	55	65	.9
K 36	36	64	75	25	42	70	72	62	58	1
K 47	46	64	75	30	42	75	77	62	63	1.1
K 55	55	64	75	35	42	80	82	62	68	1.2
K 70	70	64	75	40	42	85	87	62	73	1.3
K 85	85	72	84	36	46	82	84	70	68	1.6
K 100	100	72	84	40	46	87	89	70	73	1.7
K 120	120	72	84	46	46	92	94	70	78	1.9
K 130	130	83	96	30	53	86	74	80	67	2
K 140	140	83	96	41	53	97	85	80	78	2.5
K 180	180	83	96	46	53	102	90	80	83	2.7
K 220	220	94	108	42	58	100	102	90	84	3.1
K 240	240	94	108	47	58	105	107	90	88	3.4
K 270	270	94	108	50	58	108	110	90	92	3.6
K 300	300	94	108	55	58	113	115	90	97	3.9
K 310	310	94	108	60	58	118	120	90	102	4.2
K 280	280	110	126	43	68	95	103	112	73	4.2
K 320	320	110	126	50	68	101	110	112	80	5
K 420	420	110	126	60	68	111	118	112	90	6
K 520	520	110	126	70	68	122	128	112	100	7
K 600	600	110	126	80	68	132	138	112	110	8
K 630	630	130	150	60	80	116	122	136	95	8.8
K 750	750	130	150	70	80	126	126	136	105	10
K1000	1000	130	150	90	80	147	152	136	125	12.5
K1200	1200	130	150	110	80	167	173	136	145	14.5