





**CARACTERISTIQUES ELECTRIQUES  
ELECTRICAL CHARACTERISTICS**


Type	Rechargeable Nickel Metal Hydride	
IEC Designation	2/3 AA	
Plot / Top	FT	
Tension nominale / Nominal voltage	1.2V	
Tension mini en décharge / Mini discharge voltage	1V	
Charge standard 16h	60 mA (0.1C)	
Charge Rapide / Fast charge	300mA - 600mA	
Charge de maintien / Trickle charge	(0.05C)~(0.1C)	
Capacité nominale / Nominal Capacity	630 mAh	
Capacité mini / Minimal Capacity	600 mAh	
Cycle life at 80% DOD (0,5C)	> 500 (IEC standard)	
Resistance Interne / Internal Impedance (at 1000hz)	< 50 mΩ	
Température d'usage / Ambient temperature	Charge / Charging	0 to 45 °C
	Décharge / Discharging	-20 to 60 °C
Temperature de stockage / Storage temperature	-20 to 35 °C (Humidity: 65 ± 20 %)	
Courant de décharge Maxi / Maxi discharge current	1800mA (3C)	

**CARACTERISTIQUES PHYSIQUES  
PHYSICAL CHARACTERISTICS**


<b>Accumulateur / Battery</b>	
Dimension (mm)	28.5 x 14.5 (+/- 1)
Poids / Weight (g.)	12



Fast charge (charge control required)  
Voltage (V)

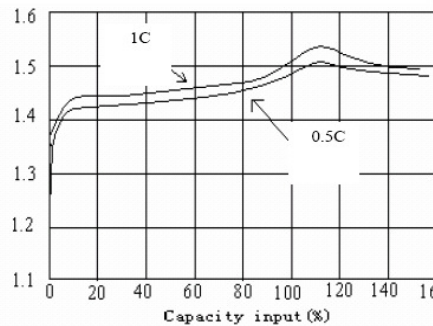

Low rate discharge  
Voltage (V)

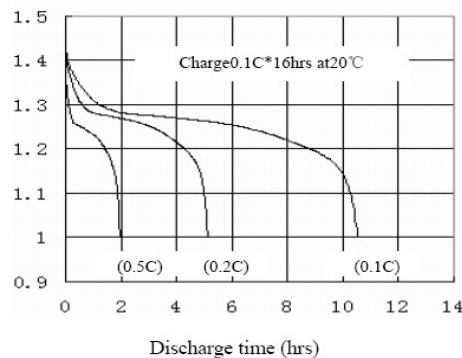

High rate discharge  
Voltage (V)

