


BES M30MM-PSC30F-BV02
Ordering code: BES00AY

Inductive sensor
M30x76,5 mm
GlobalProx

DC, direct current
PNP/Normally open (NO)
Sn = 30 mm
Non embeddable

BALLUFF
sensors worldwide

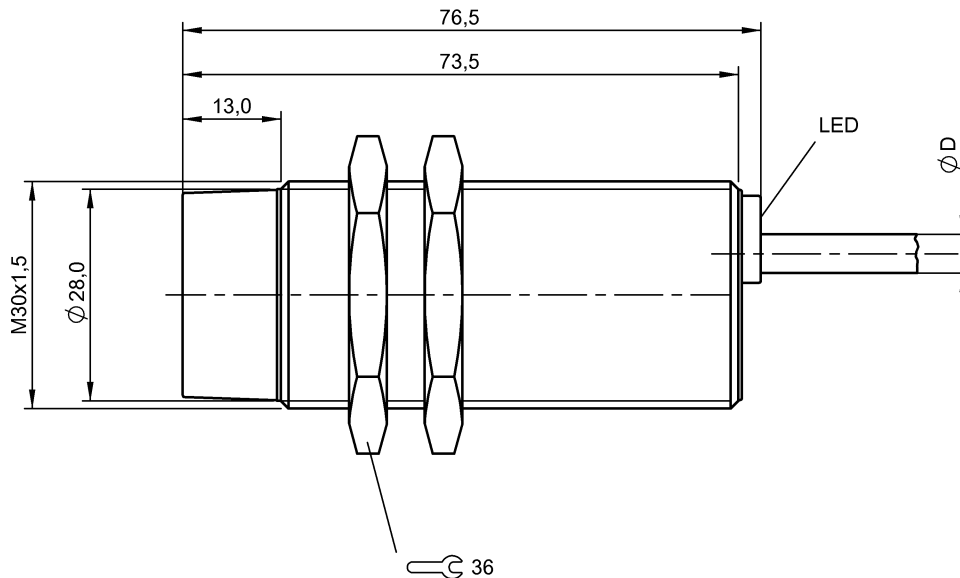

Characteristic data

Eff. switching distance Sr	30 mm
Tolerance Sr	±10 %
Assured operating distance Sa	24 mm
Hysteresis H max. (in % of Sr)	20 %
Repeat accur. R max. (% of Sr)	5 %
Ambient temperature	-25...70 °C
Temp. drift max. (% of Sr)	10%
Switching freq. f max.	300 Hz
Ready delay tv max.	20 ms
Utilisation category	DC 13
Function indicator	Yes
Power-on indicator	No
Short-circuit protected	Yes
Degree of protection as per IEC 60529	IP67
Protected against polarity reversal	Yes
Protected against reverse connection	Yes

Electrical data

Operating voltage	
Rated operating voltage Ue DC	24 V
Ripple max. (% of Ue)	15 %
Voltage drop static max.	2,5 V
Rated insulation voltage Ui	250 AC V
Effective operating current Ie	200 mA
No-load current Io damped	10 mA
No-load current Io undamped	3 mA
Off-state current Ir max.	10 µA
Minimum operating current Im	0 mA

Rated short circuit current	100 A
Output resistance Ra	33,0k + D
Load capacitance max. (at Ue)	0,5 µF
Principle of operation	Inductive

Mechanical data

Housing material	Brass
Surface protection	Nickel-free coating
Sensing surface material	PBT
Tightening torque max.	70 Nm
Mounting length	60,5 mm
Connection type	Cable
Cable jacket material	PVC
Cable diameter D max.	4,6 mm
Cable short designation	LiFYY-O
Cable length	2 m
Number of conductors	3
Conductor cross-section	0,34 mm²
Shock rating	Shock, half-sinus, 30 gn, 11ms
Vibration rating	55 Hz, 1 mm ampl., 3x30 min
Degree of contamination	3

Basic data

Basic standard	IEC 60947-5-2
----------------	---------------

Remarks

The sensor is functional again after the overload has been eliminated.
Unshielded: See installation instructions for inductive sensors with extended switching distance 853924.



Definitions see main catalog

BES M30MM-PSC30F-BV02
Ordering code: BES00AY

Inductive sensor
M30x76,5 mm
GlobalProx

DC, direct current
PNP/Normally open (NO)
Sn = 30 mm
Non embeddable

BALLUFF
sensors worldwide

subject to change

