


BES 516-3005-G-E4-C-S49-00,3
Ordering code: BES00HC

Inductive sensor
M05x27 mm
Miniature

DC, direct current
PNP/Normally open (NO)
Sn = 1,5 mm
Flush (shielded)
■ ■

BALLUFF
sensors worldwide

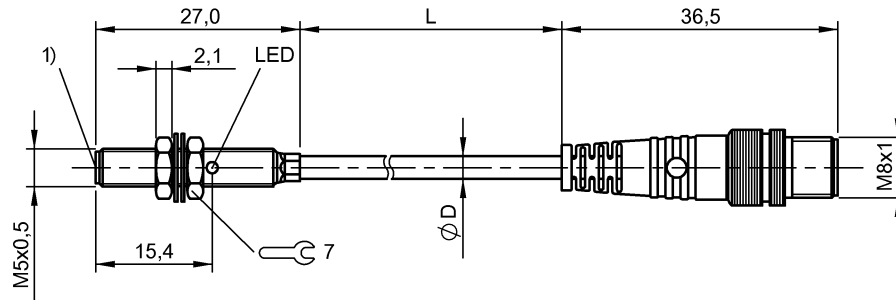

1) Active surface

Characteristic data

Assured operating distance Sa	1,2
Eff. switching distance Sr	1,5 mm
Tolerance Sr	±10 %
Hysteresis H max. (in % of Sr)	15 %
Repeat accur. R max. (% of Sr)	5 %
Ambient temperature	-25...70 °C
Temp. drift max. (% of Sr)	10%
Switching freq. f max.	3000 Hz
Ready delay tv max.	25 ms
Utilisation category	DC 13
Function indicator	Yes
Power-on indicator	No
Short-circuit protected	Yes
Protected against polarity reversal	Yes
Protected against reverse connection	Yes
Degree of protection as per IEC 60529	IP67
Principle of operation	Inductive

Electrical data

Operating voltage	10...30 V DC
Ripple max. (% of Ue)	10
Rated operating voltage Ue DC	24
Voltage drop static max.	3 V
Rated insulation voltage Ui	75 DC
Effective operating current Ie	100 mA
No-load current Io damped	10 mA
No-load current Io undamped	3 mA
Off-state current Ir max.	80 µA
Minimum operating current Im	0 mA

Rated short circuit current	100 A
Output resistance Ra	Open collector
Load capacitance max. (at Ue)	0,2 µF

Mechanical data

Connection type	Cable with connector
Connector type	M08x1-S49
Cable diameter D max.	3
Cable short designation	LiY11Y-O
Cable length	0,3 m
Housing material	Stainless steel
Sensing surface material	PBT
Cable jacket material	PUR
Shock rating	Shock, half-sinus, 30 gn, 11ms
Vibration rating	55 Hz, 1 mm ampl., 3x30 min
Degree of contamination	3
Tightening torque max.	1 Nm

Basic data

Basic standard	IEC 60947-5-2
----------------	---------------

Remarks

When using an AC bridge, an electrolytic capacitor ?10µF/40V parallel to Ub is recommended.

The sensor is functional again after the overload has been eliminated.

Embeddable: See installation notes for inductive sensors with extended switching distance 825357.

EMC: Surge immunity; external protection circuit required. Document 825345, Section 2.



Definitions see main catalog

BES 516-3005-G-E4-C-S49-00,3

Ordering code: BES00HC

Inductive sensor

M05x27 mm

Miniature

DC, direct current

PNP/Normally open (NO)

Sn = 1,5 mm

Flush (shielded)



BALLUFF

sensors worldwide

subject to change

