

DIGITUS® Category 6, Class E, S-FTP Twisted Pair Patch Cable - LSZH




- ✓ LSZH
- ✓ Boot with kink protection
- ✓ Red plug for CAT 6
- ✓ Various lengths and colors

Abstract

DIGITUS® CAT 6, Class E, S-FTP Patch Cable, LSZH, AWG 27/7, various lengths and colors

Features

- 2x RJ45 connectors
- Boots with kink protections and strain reliefs
- Spot length on boot
- Conductor: Copper wire
- Category 6, Class E
- Shielded
- Structure: 4x 2 AWG 27/7, twisted pair
- Configuration: 1:1
- Sheath: LSZH
- Various lengths and colors available

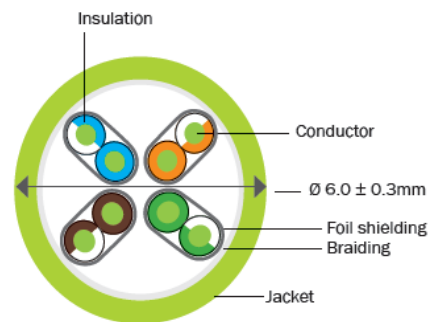

Product Overview

The new DIGITUS® Category 6 Class E S-FTP patch cables are manufactured and tested to the ISO/IEC 11801, DIN EN 50173 and DIN EN 50288-5-1 Category 6 Class E specifications. DIGITUS® patch cables will guarantee the installed cabling system is compliant with the ISO & EN channel specification requirements and will provide optimum performance levels of DIGITUS® Category 6 Class E cabling.

The patch cables have a new reworked plug with bend and latch protection, which prevents the snagging of the cable and also protects the latching lever against breaking. You can easily identify the Category 6, because of the new red colored connector.

Performance Overview

DIGITUS® Category 6 Class E S-FTP patch cables are manufactured acc. to ISO/IEC and DIN standards. The performance characteristics are tested up to 500 MHz inclusive the NEXT and ELFEXT return loss. DIGITUS® patch cables are designed and produced to fulfill the highest requirements of various application areas in full volume.

Performance- and Specification Overview

Conductor	AWG 27/7 bare copper, 7/0.135 ± 0.015 mm
Color code	Orange x White, Green x White, Blue x White, Brown x White
Insulations	HD-PE (High Density Polyethylene)
Outer sheath	LSZH
Overall diameter	6.0 mm ± 0.3 mm
RJ45 connector	3 μ minimum gold-plated in confined area (gold flash over remainder) over 100 μ nickel undercoat
Durability	750 insertion cycles
Contact resistance	230 Ω maximum
Resistance unbalance	2% maximum
Dialectric strength	2500 VDC for 3 seconds
Uninsulated resistance	150 MΩ/km minimum
Operating temperature	-20 °C up to +60 °C
Flame retardancy	IEC 60332-1
Smoke emission	IEC 61034
Colors	Various colors available on request
Marking	Brand name, cable length and cable information

Transmission Properties

Freq.	Insertion Loss	NEXT	RL	ACR-N	ACR-F	PS NEXT	PS ACR-N	PS ACRF
MHz	dB	dB	dB	dB	dB	dB	dB	dB
1.00	4.00	65.00	19.00	61.00	63.30	62.00	58.00	60.30
4.00	4.20	63.00	19.00	58.90	51.20	60.50	56.40	48.20
8.00	5.90	58.20	19.00	52.30	45.20	55.60	49.70	42.20
10.00	6.60	56.60	19.00	50.00	43.30	54.00	47.40	40.30
16.00	8.30	53.20	18.00	44.90	39.20	50.60	42.30	36.20
20.00	9.30	51.60	17.50	42.30	37.20	49.00	39.70	34.20
25.00	10.50	50.00	17.00	39.60	35.30	47.30	36.90	32.30
31.25	11.70	48.40	16.50	36.70	33.40	45.70	34.00	30.40
62.50	16.90	43.40	14.00	26.50	27.30	40.60	23.70	24.30
100.00	21.70	39.90	12.00	18.20	23.30	37.10	15.40	20.30
200.00	31.70	34.80	9.00	3.10	17.20	31.90	0.10	14.20
250.00	35.90	33.10	8.00	-2.80	15.30	30.20	-5.80	12.30

The results of the chart above are typical for Category 6, Class E patch cables 2 m, 5 m up to 10 m length

Product Number Information

