



A  
B  
C  
D  
E  
F  
G  
H

A  
B  
C  
D  
E  
F  
G  
H

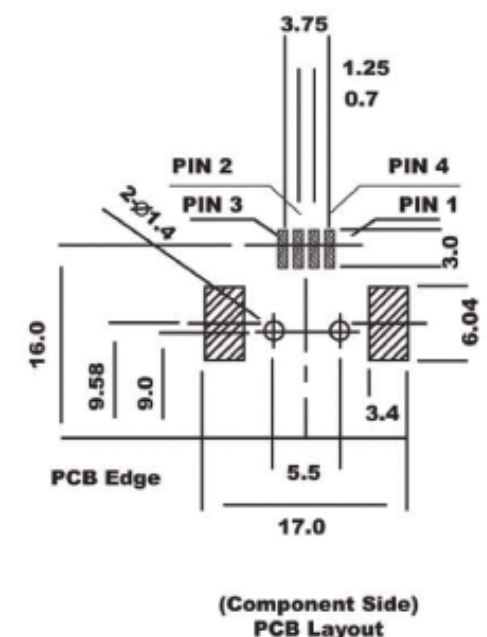

NOTE:  
 MATERIAL:  
 HOUSING:THERMOPLASTIC(PBT+GF)  
 COLOR:BLACK/WHITE/BROWN/BEIGE-----  
 CONTACT: BRASS  
 SHELL:BRASS  
 PLATING:  
 CONTACT: COLD PLATING 1u",3u",5u"....  
 SHELL: NICKEL PLATING  
 SPECIFICATION:  
 VOLTAGE RATING: 30V  
 CURRENT RATING: 1A  
 CONTACT RESISTANCE TERMINAL:30mΩ MAX  
 DIELECTRIC WITHSTANDING VOLTAGE:750V AC  
 INSULATION RESISTANCE:1000MΩ MIN

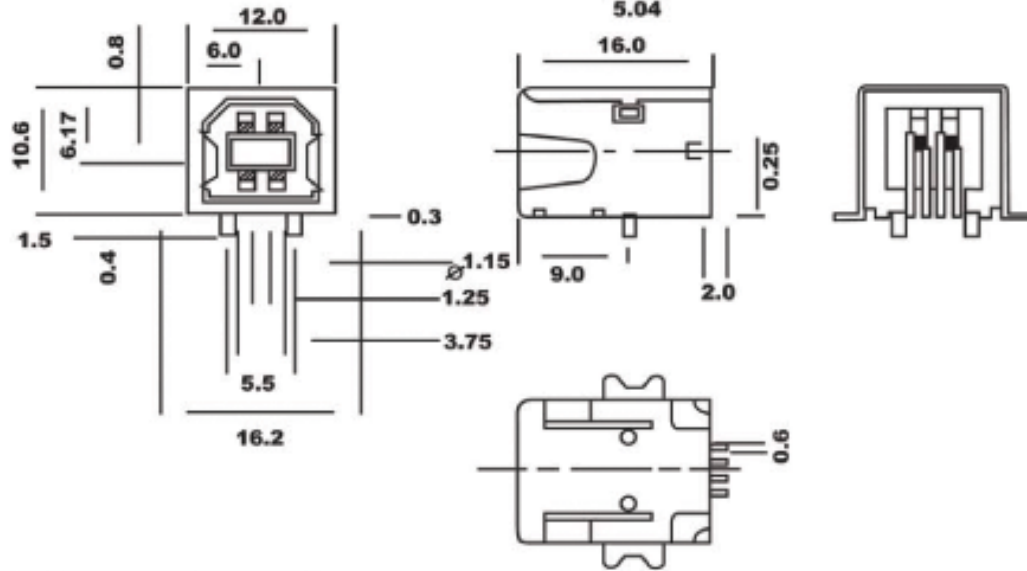

Scale	1:1						Name
TOLERANCE					Drawn	10.19.11	Chappell
X.X	±0.40				Approved		
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
Modification				Date	Name		

Item No.	A-USB-B/SMT-R (Type B, Version 1.1 5μ" Gold) A-USB/2-B/SMT-R (Type B, Version 2.0, 30μ" Gold)	
Title	USB, Type B, Angled, SMD, White Insulator	
Drawing No.		
Replace		rev00
Sheet		