

Cable
assemblies

D-Sub / Hoods
Centronics

Multiflex -
DIN41651

Modular

USB
IEEE1394

Switches

Powercords
Powerinlets

DIN41612
Hardmetric


MiniDIN

Sockets / Strips
Jumper

Terminal Blocks

Memory Card

FFC / FPC

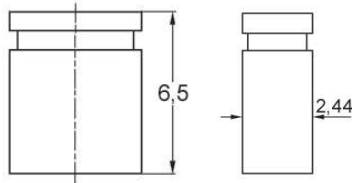

Isolierkörpermaterial
PBT, UL94V-0

Kontaktmaterial
Messing

Kontakttoberfläche
Ni, Au

Kontaktwiderstand
30mΩ max

Isolationswiderstand
1000MΩ min

Strombelastbarkeit
3A

Betriebstemperatur
-40°C - +105°C

Verpackung
Kunststoffbeutelverpackung

Insulator material
PBT, UL94V-0

Contact material
Brass

Plating
Ni, Au

Contact resistance
30mΩ max

Insulation resistance
1000MΩ min

Current rating
3A

Operating temperature
-40°C to +105°C

Packing
Polybag packing

Bestellcode / Ordercode

Oberfläche


G - Gold Flash
Z - Verzinkt

Contact plating

G - Gold flash
Z - Tinned

AKSCT / x - BLACK

Bitte „x“ durch die geeignete Option ersetzen
Please replace „x“ with appropriate option



Isolierkörpermaterial
PBT, UL94V-0

Kontaktmaterial
Messing

Kontakttoberfläche
Ni, Au

Kontaktwiderstand
30mΩ max

Isolationswiderstand
1000MΩ Min

Strombelastbarkeit
3A

Betriebstemperatur
-40°C - +105°C

Verpackung
Kunststoffbeutelverpackung

Insulator material
PBT, UL94V-0

Contact material
Brass

Plating
Ni, Au

Contact resistance
30mΩ max

Insulation resistance
1000MΩ min

Current rating
3A

Operating temperature
-40°C to +105°C

Packing
Polybag packing

Bestellcode / Ordercode

Oberfläche

G - Gold Flash
Z - Verzinkt

Contact plating

G - Gold flash
Z - Tinned

AKSPLT / x - BLACK

Bitte „x“ durch die geeignete Option ersetzen
Please replace „x“ with appropriate option