NAIS

HIGH POWER AUTOMOTIVE RELAY

CB-RELAYS

N.C.: 10 A 28 V DC





FEATURES

- 40 A rating at 85°C 185°F
- ISO type terminals
- · High shock resistance for drop test requirements
- (2 meters 6.6 feet)
- Low temperature rise all current carrying material is copper.
- Quick connect and PC board type

mm inch

SPECIFICATIONS

Contact

(1) Standard type (12V coil voltage)

Arrangement		1 Form A 1 Form C		High contact capacity (1 Form A)		
Rating	Nominal switching capacity	40 A 14 V DC	N.O.: 40 A 14 V DC N.C.: 30 A 14 V DC	70 A 14 V DC (at 20°C 68°F) 50 A 14 V DC (at 85°C 185°F)		
	Max. switching current (at 85°C 185°F)	40 A 14 V DC	N.O.: 40 A 14 V DC N.C.: 30 A 14 V DC	40 A 14 V DC		
Initial contact r	esistance, max.		15mΩ			
Contact material		Silver alloy				
	Mechanical (at 120 cpm)	Min. 10 ⁶				
Expected life	Electrical (at rated load)	Flux-resistant type: Min. 10 ^{5*1} Sealed type: Min. 5 × 10 ⁴				
(2) Standard t	ype (24V coil voltage)					
Arrangement		1 Form A		1 Form C		
Rating	Nominal switching capacity	20 A 28V DC	DC N.O.: 20 A 28 V DC N.C.: 10 A 28 V DC			
	Max. switching current	20 A 28 V DC	20 A 28 V DC N.C.: 20 A 28 V DC			

^{*1} All other specifications are the same as those of standard type (12V coil voltage)

(3) Heat resistant type (12V, 24V coil voltage)

(at 85°C 185°F)

Туре		12V coil voltage		24V coil voltage		
Arrangement		1 Form A	1 Form C	1 Form A	1 Form C	
Rating	Nominal switching capacity	35 A 14V DC	N.O.: 35 A 14 V DC N.C.: 30 A 14 V DC	20 A 28 V DC	N.O.: 20 A 28 V DC N.C.: 10 A 28 V DC	
	Max. switching current (at 85°C 185°F)	35 A 14 V DC	N.O.: 35 A 14 V DC N.C.: 30 A 14 V DC	20 A 28V DC	N.O.: 20 A 28 V DC N.C.: 10 A 28 V DC	

*1 All other specifications are the same as those of standard type (12V coil voltage)

Coil

Arrangement	Coil voltage	Nominal operating power	
1 Form A,	12V DC	1.4W	
1 Form C	24V DC	1.8W	
High contact capacity	12V DC	1.8W	

Characteristics

Max. operating speed (at rated load)			15 cpm		
Initial insulation resistance*2	nitial insulation resistance*2		Min. 20 MΩ (at 500 V DC)		
laitial brookdown voltogo*2	Between open	contacts	500 Vrms for 1 min.		
Initial breakdown voltage*3	Between conta	acts and coil	500 Vrms for 1 min.		
Operate time*4 (at nominal volta	age)		Max. 15 ms		
Release time (without diode)*4	(at nominal voltage)		Max. 15 ms		
Shock resistance		Functional*₅	Min. 200 m/s ² {20 G}		
		Destructive*6	Min. 1,000 m/s² {100 G}		
Vibration resistance		Functional*7	10 to 500Hz, Min. 44.1m/s ² {4.5G}		
		Functional*8	10 to 2,000Hz, Min. 44.1m/s ² {4.5G}		
Conditions for operation, transport and storage ^{*9} (Not freezing and condensing at low temperature)		Ambient temp.	-40°C to +85°C -40°F to +185°F (Heat resistant type: -40°C to +125°C -40°F to +257°F)		
		Humidity	5 to 85% R.H.		
Unit weight			Approx. 33 g 1.16 oz		

Remarks

- * Specifications will vary with foreign standards certification ratings.
 *1 All other specifications are the same as those of standard type (12V coil voltage)
 *2 Measurement at same location as "Initial breakdown voltage" section

- *3 Detection current: 10 mA *4 Wave is standard shock voltage of $\pm 1.2 \times 50 \mu s$ according to JEC-212-1981

 *6 Half-wave pulse of sine wave: 11ms; detection time: 10 μs *7 Half-wave pulse of sine wave: 6ms

*8 Detection time: 10µs * Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (Page 61)

*5 Excluding contact bounce time

- **TYPICAL APPLICATIONS**
- Automotive system
- ABS, Head Lamp, Air conditioner
- Tracter, Combine

ORDERING INFORMATION

CB 1 F — T — R M — 12 V							
Contact arrangement	Protective construction	Heat resistant of types	Type classification	Mounting classification	Coil voltage (DC)		
1a: 1 Form A 1: 1 Form C 1aH: High contact capacity ^{*1} (1 Form A)	Nil: Sealed type F: Flux-resistant type	Nil: Standard type T: Heat resistant type* ²	Nil: Standard type D: with diode inside R: with resistor inside	Nil: Quick connect type P: PC board type M:Bracket type	12, 24 V		

Note: Bulk pakage: 50 pcs.; Case: 200 pcs.

*1 High contact capacity type is available only for "Quick connect" and 12 V. (See "1. Standard type in TYPES" Page 380)

*2 Heat resistant type with high contact capacity is not available.

(See "2. Heat resistant type in TYPES" Page 381)

TYPES

1. Standard type

Contact arrangement	Mounting close if is at is a		Part No.		
Contact arrangement	Mounting classification	Coil voltage, V DC	Sealed type	Flux-resistant type	
	DC beard type	12V	CB1a-P-12V	CB1aF-P-12V	
	PC board type	24V	CB1a-P-24V	CB1aF-P-24V	
1 Form A	Quick connect type	12V	CB1a-12V	CB1aF-12V	
FOIMA	Quick connect type	24V	CB1a-24V	CB1aF-24V	
	Drocket type	12V	CB1a-M-12V	CB1aF-M-12V	
	Bracket type	24V	CB1a-M-24V	CB1aF-M-24V	
	PC board type	12V	CB1-P-12V	CB1F-P-12V	
	PC board type	24V	CB1-P-24V	CB1F-P-24V	
1 Form C		12V	CB1-12V	CB1F-12V	
Forme	Quick connect type	24V	CB1-24V	CB1F-24V	
	Drocket type	12V	CB1-M-12V	CB1F-M-12V	
	Bracket type	24V	CB1-M-24V	CB1F-M-24V	
High contact capacity (1 Form A)	Quick connect type	12V	CB1aH-12V	CB1aHF-12V	

2. Heat resistant type					
Contrast arrangement	Mounting clossification	Coil voltage, V DC	Part No.		
Contact arrangement	Mounting classification		Sealed type	Flux-resistant type	
		12V	CB1a-T-P-12V	CB1aF-T-P-12V	
	PC board type	24V	CB1a-T-P-24V	CB1aF-T-P-24V	
1 Form A	Quick connect type	12V	CB1a-T-12V	CB1aF-T-12V	
FOINTA		24V	CB1a-T-24V	CB1aF-T-24V	
	Bracket type	12V	CB1a-T-M-12V	CB1aF-T-M-12V	
		24V	CB1a-T-M-24V	CB1aF-T-M-24V	
		12V	CB1-T-P-12V	CB1F-T-P-12V	
	PC board type	24V	CB1-T-P-24V	CB1F-T-P-24V	
		12V	CB1-T-12V	CB1F-T-12V	
1 Form C	Quick connect type	24V	CB1-T-24V	CB1F-T-24V	
	Descharting	12V	CB1-T-M-12V	CB1F-T-M-12V	
	Bracket type	24V	CB1-T-M-24V	CB1F-T-M-24V	

COIL DATA (at 20°C 68°F)


Contact arrangement	Nominal voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (mim.)	Nominal current, mA (±10%)	Coil resistance, Ω (±10%)	Nominal operating power, W	Usable voltage range, V DC
1 Form A 1 Form C	12	3 to 7	1.2 to 4.2	117	103	1.4	10 to 16
	24	6 to 14	2.4 to 8.4	75	320	1.8	20 to 32
High contact capacity (1 Form A)	12	3 to 7	1.2 to 4.2	150	80	1.8	10 to 16


DIMENSIONS

1. PC board type



2. Quick connect type





0

5-6.3

26.0-1 024

7.9

2.6


25.0

11.0

1.7 dia

Venting hole

0.8







0

22.0

Max. 1mm .039 inch: 1 to 3mm .039 to .118 inch: $\pm 0.2 \pm .008$ Min. 3mm .118 inch:

Schematic (Bottom view)






±0.1 ±.004



±0.3 ±.012

Schematic (Bottom view)



Including diode type, including load type also available

Dimension: Max. 1mm .039 inch: 1 to 3mm .039 to .118 inch: $\pm 0.2 \pm .008$

Min. 3mm .118 inch:

General tolerance **±0.1** ±.004 ±0.3 ±.012


mm inch

CB

381


3. Bracket type








mm inch



Including diode type, including load type also available



Dimension: Max. 1mm .039 inch: 1 to 3mm .039 to .118 inch: ±0.2 ±.008 Min. 3mm .118 inch:


2-9.5^{±0.08}

General tolerance

±0.1 ±.004 ±0.3 ±.012

4. High contact capacity type



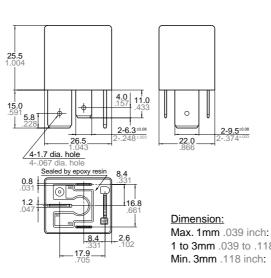

2. Electrical life test (Motor load)

Tested sample: CB1a-12V, 3pcs.

Load: 18A steady, Inrush 82A


Schematic (Bottom view)



General tolerance ±0.1 ±.004 1 to 3mm .039 to .118 inch: $\pm 0.2 \pm .008$ ±0.3 ±.012

REFERENCE DATA

1. Coil temperature rise Tested sample: CB1aF-P-12V, 3pcs. Ambient temperature: 85°C 185°F Contact carrying current: 40A

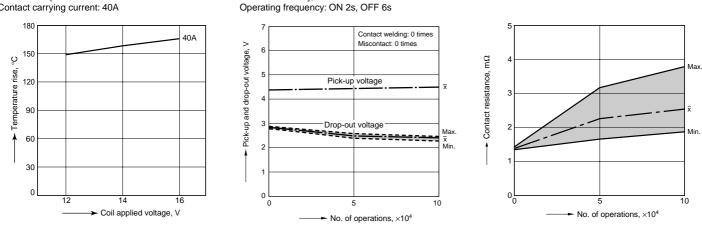

For Cautions for use, see Relay Technical Information (Page 48 to 76).